

LA RANGE Data sheet

MAIN MODULE


FEATURES	LA xxx		
DOCUMENTS PROCESSING THROUGHPUT: based on full process: Reading +Imaging back / front + Printing + sorting - Document size: 125 mm / 5" (Ex:Meal ticket or Voucher) - Document size: 153 mm / 6" (Ex: US check) - Document size: 175 mm / 7" (EX: French Check) - Document size: 205 mm or 8"	LA 350	LA 600	LA 800
	420 dpm	720 dpm	960 dpm
	350 dpm	600 dpm	800 dpm
	300 dpm	510 dpm	680 dpm
	260 dpm	450 dpm	600 dpm
AUTOMATIC FEEDER - Capacity - Advanced feeder: "Smart feed technology" - Mixed docs - Multi face & Head to tail feed	Up to 3200 docs √ √ Optional		
DOUBLE FEED DETECTOR Ultrasound	√		
OUTPUT POCKETS - Sorting module up to 48 pockets - Sort, « flip flop », bad reading reject function	Optional Depend on soft application		
MAGNETIC CHARACTERS RECOGNITION - CMC7, E13B or both - Double Head	√ √		
OPTICAL MICR CONTROL & VALIDATION	Optional		
OPTICAL READING (on documents with mixed location) - Bar codes, datamatix - OCR-A, OCR-B, true type fonts & handwritten - Clock marks (OMR)	Optional Optional Optional		
IMAGE CAPTURE CIS technology scanner location available everywhere on documents patch, upstream or downstream, front or back 1 st front scanner upstream: Reading 2 nd front scanner downstream: archiving after encoding 3 rd back scanner upstream: reading 4 th back scanner downstream: archiving after endorsing	√ Optional Optional Optional		
IMAGE - Resolution 100 / 200 Dpi 256 grey level: JPEG, BMP - Bi-tonal (Black/White): CCITT – group 4 - Color, UV, Infra-red or mixed	√ √ √ Optional		
ADVANCED ENDORSEMENT & PRINT Print Head location available everywhere on documents patch, upstream or downstream, front, back or mixed - Programmatically controllable based on: MICR Read, Image, Software - Vertical print location adjustable	Optional, up to 3 √		
PRINT TECHNOLOGY - Graphic head printer (graphic & alphanumeric mixed capability) - Graphic: Bitmap, Signature, Logoetc - Up to 5 lines print capability, 100 characters per line, 5 fonts in memory - Print capacity (WO signature) alphanumeric 100 dpi	√ Up to 18 000 000 c		

FEATURES				LA xxx
ENCODING - One head Magnetic ink jet technology located on main module documents path - Printing capacity - Kind of characters				Optional (no added module) Up to 2 500 000 c Cmc7 or E13B *With encoding feature activated
THROUGHPUT*	LA 350	LA 600	LA 800	
Size 125 mm / 5'' (Example :meal ticket)	335	335	335	
Size 153 mm / 6 '' (Ex : US cheque)	295	295	295	
Size 175 mm / 7'' (EX : French cheque)	265	265	265	
Size 205 mm ou 8 pouces	225	225	225	
OPERATOR INTERFACE 3 Buttons 'applications': customizable according to the application - Control screen: To control the image quality on flow				
DOCUMENT SIZES Minimum: 50x 120 mm, Maximum: open x 214 mm, Paper weight: 75 to 140 gr				√
Computer interface				USB2 high-speed
SOFTWARE APPLICATION Customer soft application via OCX (Activips) or VIPS software				Optional
INTERFACE OPERATING: Windows 10 & 11 pro edition				√
POWER SUPPLY - External: Two power supply 24 v & Two power supply 36 v - Power requirement 110/240 VAC (+/- 10%) 50/60 Hz (+/- 10%) - Absorbed power on process:				√ √ 460 Watts Maxi
SECURITY - Open covers detectors & Emergency Stop switch - Switch on /off controlled by Key				√ √
WEIGHT - Single module - Furniture				75 kg 85 kg

SORTING MODULE

FEATURES	
12 (Twelve) POCKETS SORTING MODULE : UP TO 4 (Four) modules per LA - Capacity (per pocket) - Stacking screw & Opposite pockets technology	Up to 250 docs √
POWER SUPPLY - External: one power supply 24 v & one power supply 36 v - power requirement 110/240 VAC (+/- 10%) 50/60 Hz (+/- 10%) - Absorbed power on process	√ √ 230 Watts
WEIGHT - Single module - Furniture	45 Kg 65 kg

SIZE

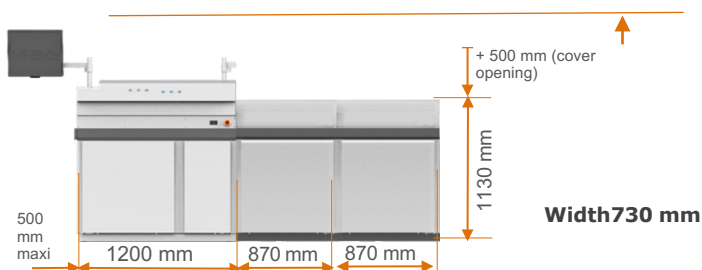

Let's get in touch!
info@globalis.com

Headquarters &
Americas Operations

www.globalis.com

Middle East, Africa
& Asia Operations

www.alistech.ae