

# PRINTRONIX®



## Dual Branded Line Matrix Printers



Flexible Design | Adaptable Functionality | Manageable Savings



## P8000 Cartridge Printers Deliver New Designs, Enhanced Convenience and Lower Operating Cost

Printronic introduces design enhancements and improved functionality with the P8000 Cartridge Printer series to achieve the broadest flexibility, greatest compatibility and lowest ownership cost of virtually any other print technology. The series builds upon the workhorse tradition of all Printronic line matrix technology delivering maximum uptime, low cost of ownership, and reliable performance. The P8000 series is the ideal solution for buyers looking to minimize operating expense without sacrificing output reliability, regardless of operating environment.

### FLEXIBLE DESIGN

Printronic modified its industry-leading line matrix technology to address evolving user requirements.

- **Modular enclosures** occupy a smaller footprint while delivering location and installation flexibility
- **Sheet metal construction** for increased durability and better acoustics
- **New user interface** with larger LCD screen, graphical display and intuitive menu navigation
- **Remote printer diagnostics** let you monitor printer status and remotely configure settings & firmware

### ADAPTABLE FUNCTIONALITY

The **P8000** Cartridge series adapts to almost any supply-chain or back-office environment.

- **USB 2.0, Serial, Parallel and Ethernet** connectivity included as standard features.
- **PowerPrint™** delivers improved print quality and print darkness on multi-part forms by increasing impact energy. Comes standard on 500 & 1000lpm **P8000** models.

### MANAGEABLE SAVINGS


The **P8000** Cartridge Printer is a smart purchase

- **Lowest cost of ownership** of any print technology.
- **Durable design minimizes** downtime related to unfavorable environmental conditions.
- **Backwards-compatible cartridge ribbons** reduce inventory management costs.
- **Energy efficient technology** lowers idle power consumption and boosts operating efficiency.

# P8000 Line Matrix Printers



The flagship model in the series, the **P8000 Open Pedestal** is a dependable line matrix printer that delivers maximum uptime and lowest total cost of ownership. Its compact size makes it easy to move within your environment and is ready to plug into your network and start printing from day one.

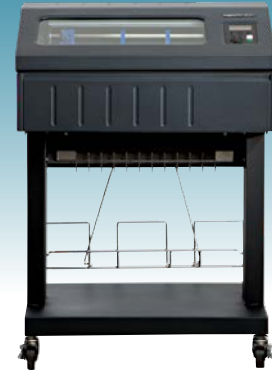

PRINTER CABINET STYLE	Open Pedestal	
<b>Standard Features &amp; Options</b>	<b>P8P05 / P8P10</b>	
Integrated Print Management	Standard	
Ribbon Life Monitor	Standard	
Black back forms paper out sensor	Option	
Rear slide out paper drawer		
Cabinet front paper access		
Extended forms support doors		
High rear paper tray	Option	
Low rear paper tray	Standard	
Acoustic shroud	Option	
<b>Dimensions</b>	<b>With Basket</b>	<b>Without Basket</b>
Height	35.9" (911.8 mm)	35.9" (911.8 mm)
Width	25.8" (655.3 mm)	25.8" (655.3 mm)
Depth	29.1" (739.1 mm)	19.1" (485.1 mm)
Printer Weight	115 lbs (52.1 kg)	115 lbs (52.1 kg)
Shipping Printer Weight	165 lbs (74.8 kg)	165 lbs (74.8 kg)
<b>Environmental Noise</b>	<b>P8P05</b>	<b>P8P10</b>
Acoustic Noise (dBA) per ISO 7779	62	65
<b>PRINTER CONFIGURATION</b>	<b>P8P05</b>	<b>P8P10</b>
<b>Print Speed</b>	<b>LPM, upper case/lower case characters</b>	
High Speed (Draft)	500/428	1000/856
Data Processing	375/300	750/600
Near Letter Quality	200/154	400/306
<b>Graphics Speed</b>	<b>Inches (mm) per minute</b>	
60 x 48 dpi	63 (1600)	125 (3175)
60 x 72 dpi	42 (1067)	83 (2108)
90 x 96 dpi	21 (533)	42 (1067)
<b>Paper Feed Speed</b>	<b>Inches (mm) per second</b>	
Speed	12 (305)	20 (508)

The **P8000 Zero Tear** is the specialized cartridge line matrix printer choice for customers using pre-printed and serialized documents that require print on demand, single form tear-off usability. The Zero Tear is designed to eliminate wasted forms and reduce operating costs.



The **P8000 Cabinet** is the preferred choice for print environments where acoustic emissions need to be kept to a minimum. Its modular design, wide selection of paper handling options, and reliable performance make it ideal for office environments or noise adverse areas running large, unattended print applications.



### Zero Tear

#### P8Z05 / P8Z10

Standard

Standard

Standard

#### With Basket

#### Without Basket

42.04" (1067.8 mm)

42.04" (1067.8 mm)

25.8" (655.3 mm)

25.8" (655.3 mm)

31.9" (810.2 mm)

19.1" (485.1 mm)

145 lbs (66 kg)

N/A

190 lbs (86 kg)

N/A

#### P8Z05

#### P8Z10

64

68

### P8Z05

### P8Z10

#### LPM, upper case/lower case characters

500/428

1000/856

375/300

750/600

200/154

400/306

#### Inches (mm) per minute

63 (1600)

125 (3175)

42 (1067)

83 (2108)

21 (533)

42 (1067)

#### Inches (mm) per second

12 (305)

20 (508)

### Cabinet

#### P8C05 / P8C10

#### P8C15 / P8C20

Standard

Standard

Standard

Standard

Option

Option

Option

Option

Option

Option

Option

Option

#### Cabinet

#### Cabinet

40.5" (1028.7 mm)

40.5" (1028.7 mm)

27" (685.8 mm)

27" (685.8 mm)

29" (736.6 mm)

29" (736.6 mm)

200 lbs (90.7 kg)

200 lbs (90.7 kg)

265 lbs (120.2 kg)

265 lbs (120.2 kg)

#### P8C05

#### P8C10

#### P8C15

#### P8C20

50

50

52

55

### P8C05

### P8C10

### P8C15

### P8C20

#### LPM, upper case/lower case characters

500/428

1000/856

1500/1289

2000/1700

375/300

750/600

1125/900

1500/1200

200/154

400/306

600/459

800/615

#### Inches (mm) per minute

63 (1600)

125 (3175)

187 (4750)

250 (6350)

42 (1067)

83 (2108)

127 (3226)

167 (4242)

21 (533)

42 (1067)

61 (1549)

83 (2108)

#### Inches (mm) per second

12 (305)

20 (508)

25 (635)

39 (991)



# ORACLE SAP LINUX WINDOWS COMPATIBILITY

## OpenPrint™ – The World's First PostScript and PDF Line Matrix Printer



Printronix offers the world's only PostScript and PDF® line matrix printer. The OpenPrint Cartridge Series allows the printer to communicate directly with today's modern enterprise resource planning (ERP) environments, including Oracle®, SAP®, Linux® and Windows®. With OpenPrint, PDF or PostScript files can be sent directly to the printer without hard-coding or special drivers. Output quality is improved because it utilizes PostScript image and graphic capabilities as well as sure scan barcode software.

The OpenPrint platform offers our customers an unprecedented opportunity to implement the industrial strength of line matrix technology within most ERP environments. The easy and instant connectivity of PostScript and PDF files enables IT administrators to quickly deploy new forms and business documents to Printronix line matrix printers throughout ERP enterprise operations. OpenPrint technology provides improved fine point text and fonts - from six point to poster size. It also improves the rendering of barcodes within the printer resulting in enhanced form readability and utility.



# P8000 Product Specifications

## CONNECTIVITY/INTERFACES

Standard USB 2.0, Serial RS-232, Ethernet 10/100BaseT, Parallel - IEEE 1284 Centronics

## CHARACTER PITCH (CHARACTERS PER INCH)

10, 12, 13.3, 15, 16.7, 17.1, 18, 20

## LINE SPACING (LINES PER INCH)

6, 8, 9, 10.3, n/72, n/216

## GRAPHICS RESOLUTION

120 dpi Horizontal, 144 dpi Vertical (max)

## DOT SIZE

16.7 mil (.42mm)

## EMULATIONS

Standard LP+ (Printronix P-Series, P-Series XQ, Serial Matrix, IBM ProPrinter III XL, Epson FX-1050) ANSI, PCL 2, TN5250/TN3270, Graphics Emulation PGL & VGL

Optional IPDS, DEC LG

OpenPrint Standard Ghostscript Postscript (Level 3 compatible), PDF (Level 1.7 compatible), Printronix PJJ

## CHARACTER SETS

99 plus character sets including ECMA Latin 1, DEC Multinational, IBM Code Page 437 and 850, OCR A, OCR B, UTF8 encoded Unicode

## CHARACTER STYLES

Bold, italic, double wide, double high, overstrike, underline, subscript and superscript

## FONTS

NLQ Serif, NLQ Sans Serif, Data Processing, High Speed, OCR A, OCR B

## BARCODES

30 resident symbologies, including Code 39, EAN 8/13, UPC A/E, Intelligent Mail, Postnet, Royal Mail, Interleaved 2 of 5, PDF 417, Data Matrix

## PRINTER SOFTWARE

Printronix PrintNet Enterprise remote management software, SAP device support

## PRINTER DRIVERS

Windows XP, 7, 8, 10; Windows Server 2003, 2008/R2, 2012, 2016; Linux/UNIX; SAP

## POWER VOLTAGE

AC input range 100-240 VAC, 50/60 HZ

## POWER CONSUMPTION (TYPICAL)

• P8P05 / P8C05 / P8Z05	320 watts
• P8P10 / P8C10 / P8Z10	320 watts
• P8C15	475 watts
• P8C20	475 watts

## POWER CONSUMPTION (STANDBY)

5 watts

## OPERATING TEMPERATURE

Environmental Operating Temperature 50° to 104° F, 10° to 40° C

## PAPER TYPE

Continuous, fan folded, edge-perforation

## PRINT WIDTH

13.6" (345mm)

## MEDIA COPIES

Up to 6 part

## MEDIA LENGTH

3" (76mm) to 12" (305mm)

## MEDIA THICKNESS MULTI-PART

0.025" (0.64mm) max

## MEDIA WIDTH

- 3" (76mm) to 17" (432mm)
- For Zero Tear models:
  - 7.5" (191mm) to 12" (305mm) for up to 4 part carbon and 6 part carbonless
  - 7.5" (191mm) to 16" (406mm) for up to 3 part carbon and 4 part carbonless

## MEDIA WEIGHT SINGLE PLY

- 15 lb. Bond to 100 lb. Tag (56 to 163 g/m<sup>2</sup>)
- For Zero Tear models:
  - 18 lb. Bond to 100 lb. Tag (67.7 to 163 g/m<sup>2</sup>) for forms up to 12" (305mm) in width
  - 20 lb. Bond to 100 lb. Tag (75.2 to 163 g/m<sup>2</sup>) for forms up to 16" (406mm) in width

## MTBF

10,000 hours at 25% duty cycle and 25% page density

## CONSUMABLE/RIBBONS

Standard Life Cartridge Ribbon 17,000 pages

Extended Life Cartridge Ribbon 30,000 pages

Page yield based on ISO LSA Page, 8.5" x 11" letter-size, approximately 5% coverage