



**HIGH PERFORMANCE,  
IMPRESSIVE COST  
EFFECTIVENESS**

## Efficient Flash Fusing Printer for Sensitive Materials

### HIGHLIGHTS / FEATURES / SPECIAL ATTRIBUTES

- Prints on paper, PVC, plastic, etc.
- USB, Ethernet (10/100/1000 Mbit) as standard
- Laser and matrix printer compatible
- SAP®- und AS/400-compatible (through PCL5 + JetCAPS as well as LAN-IPDS)
- Perfect control via Status Out

### FIELD OF APPLICATION

- Label batch printing
- Ticket printing
- Business and logistics documents



**Let's get in touch!**  
[info@globalis.com](mailto:info@globalis.com)

Headquarters &  
Americas Operations

 [www.globalis.com](http://www.globalis.com)

Middle East, Africa  
& Asia Operations

 [www.alistech.ae](http://www.alistech.ae)

## Print Engine

<b>Print technology</b>	LED, OPC, Xenon-flash lamp
<b>Controller</b>	MPC 3.4
<b>Print speed</b>	2000 lpm (6 lpi), up to 40 pages/minute (A4 landscape) 8,4 m/min
<b>Print resolution</b>	max. 600 dpi x 600 dpi
<b>Duty cycle</b>	up to 300.000 pages (based on a using period of 60 months)
<b>Power supply</b>	230 VAC +/- 10% , 50 Hz
<b>Power consumption</b>	max 3,0 kVA (delivery with 16 A, CEE connector)
<b>Acoustic noise</b>	< 55 dB (A)
<b>Dimensions (W x D x H in mm)</b>	805 x 850 x 1250 mm
<b>Weight</b>	240 kg (incl. stacker)
<b>Environment temperature</b>	10 - 30°C
<b>Relative humidity</b>	30 - 80 % (rel., non-condensing)
<b>Interfaces</b>	USB Ethernet-Interface 10/100/1000 MBit, bi-direktional (TCP/IP)
<b>Optional</b>	IEEE 1284 (Centronics), WLAN IEEE 802.11 n/g/b, WEP mit 64 und 128 Bit, WPA/WPA2, WPA-PSK/WPA2-PSK
<b>Memory</b>	RAM: 4 GB Flash: 16 GB

## MPC 3.x High-End Print-Controller

### Emulations

MICROPLEX IDOL, HP-PCL5/ HPGL, AGFA Reno, µ-Postscript, LN03+, BULL-MP6090, Etimark MP-1220, TEC Bx72, TEC B6xx, Diablo 630, IBM Proprinter, EPSON FX-80, MT-600/MT40, IDS, ANSI Genicom, TIFF, XML (SAP® RFID), CUPS Raster

### Optional Emulations

CODE-V (Magnum), XEROX XES, KODESCRIPT+, Prescribe/PSB 2, IGP/PGL, Datamax, Labelpoint, LDC, ZPLII, EPL 2, Intermec Direct Protocol, IER Command, cab, Godex EZPL, HP Designjet, IPDS, AEA, PDF Direct Printing\*, (more emulations on request)

### Barcodes

Codebar, Code39, MSI, PDF417, Interleaved 2/5, Interleaved 2/5 (3-stroke Datalogic), EAN-8, 13, 128, Interleaved 2/5 (3-Stroke Matrix), Add-On-Codes, Code11, Code93, Code 128, UPC-A, UPC-E

### Optional barcodes (Barcode 2)

Datamatrix, Maxi-Code, QR Code, Aztec-Code, USD-5 (more barcodes on request)

### Additional functions

<b>Network capabilities</b>	authentication standard IEEE 802.1X
<b>Intelligent barcode generation</b>	on-the-fly in the printer.
<b>Format splitting</b>	in several subformats by command.
<b>Integrated form management (RFM)</b>	Forms and fonts can be stored in the flash memory and can be accessed when needed.

### Optional functions

#### Status-Out

Gives notice of each correctly printed page via interface. Further features can be found in the manual.

#### Programmable GPIO-Interface (SPS-Control)

EMBEDDED INTELLIGENCE – Enabling two-way communication between printer and a PLC.  
Integration of the printer into production lines is possible, controlled by GPIO-interface  
Customer and application specific modifications possible.




## Printable Media

### Size

Form length	7" - 24"
With stacker	8" - 14"
Form width	6,5" - 16"
Printable area	14,6"

### Weight

60 - 204 g/m²

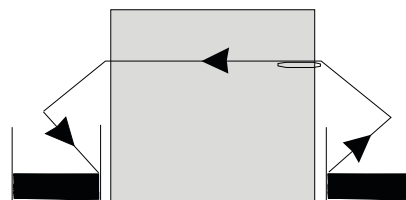

## Paper Path

### Input

push tractor

### Output

stacker

capacity: 3.000 pages (at 64 g/m²)

(minimal weight (64 g / m²) depending on paper properties and quality of material conversion)

